


# BUILD-A-BOOTH


emilylongbrake.com

3 BOOTH PANELS: 2 SIDE, 1 BACK:

3 HEADERS  
3 FOOTERS  
9 LADDERS  
12 SHELVES



PANELS FIT IN A 10'X10' BOOTH SPACE

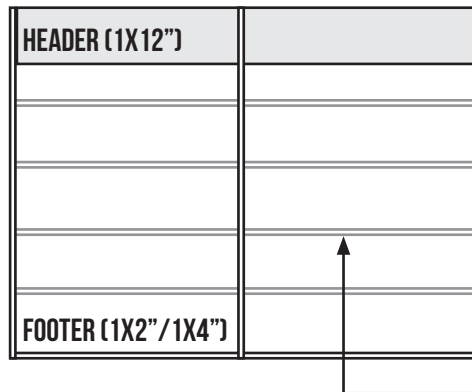

LADDER

6'

11.5"

SHELVES

## SHOPPING LIST

QTY	ITEM	LOWE'S PRICE	HOME DEPOT PRICE	SBS PRICE	BUY AT:	TOTAL COST:
22	2X2" X 8' (169 LIN. FT.)	\$1.98	\$1.95	\$3.44	HD	\$42.90
2	1X2" X 8'	\$1.28	\$1.28	\$1.65	LOWES	\$1.28
1	1X4" X 10'	\$6.88	\$9.82	\$5.20	SBS	\$5.20
10	1X12" X 8'	\$12.58	\$18.81	\$13.94	LOWES	\$125.80
5	1X12" X 10'	\$22.42	NA	\$14.52	SBS	\$72.60
						TOTAL: \$247.78
OTHER: CLAMPS FOR SECURING CORNERS (HOLDS 2 2X2"), SCREWS, DRIVER BIT, COUNTERSINK BIT, SANDPAPER, VARNISH/SEALER						

## CUTTING LIST

PART	QTY	DIMENSIONS (LXWXH)
LADDERS	9	FINAL: 1.375"X14.5"X6'
UPRIGHTS	18	2X2" X 6'
RUNGS	63	2X2" X 11.5"
FOOTERS		
SIDE PANELS	2	1X2" X 8'
BACK PANEL	1	1X4" X 9.5'
HEADERS		
SIDE PANELS	2	1X12" X 8'
BACK PANEL	1	1X12" X 10'
SHELVES		
SIDE SHELVES	8	1X12" X 8'
BACK SHELVES	4	1X12" X 10'

## INSTRUCTIONS

CUT PIECES ACCORDING TO CHART AND SAND ALL SURFACES.

NOTE: ALL LUMBER DIMENSIONS ARE LISTED AS "COMMON" SIZES: A 2X2" WILL HAVE AN ACTUAL MEASUREMENT OF 1.5X1.5", FOR EXAMPLE. PREDRILL AND COUNTERSINK ALL SCREWS. ASSEMBLE LADDERS: TOENAIL FROM UNDER RUNG SO SCREWS DON'T SHOW. ATTACH HEADERS AND FOOTERS TO LADDERS. SCREW SHELVES TO LADDERS FROM TOP TO PREVENT RACKING. MARK CORNERS AND SHELVES AS NEEDED FOR MATCHING UPON SETUP. DISASSEMBLE AND FINISH ALL SURFACES.

## BOOTH SETUP

BUILD BACK PANEL FIRST: LAY OUT LADDERS. MATCH AND SCREW HEADER AND FOOTER TO LADDERS. STAND UP PANEL AND ADD SHELVES, MATCHING AND SCREWING TO LADDERS. CLAMP TOP AND BOTTOM OF SIDE AND BACK PANELS TOGETHER.

S E L L , S E L L , S E L L !